


bale opener/开包机

reference line/生产线参考

- WOOL DEBURRING LINE 羊毛除杂生产线
- OPENING AND BLENDING LINE 和毛与纤维混合生产线
- WOOLLEN SPINNING LINE 粗梳毛纺生产线

process flow/生产流程

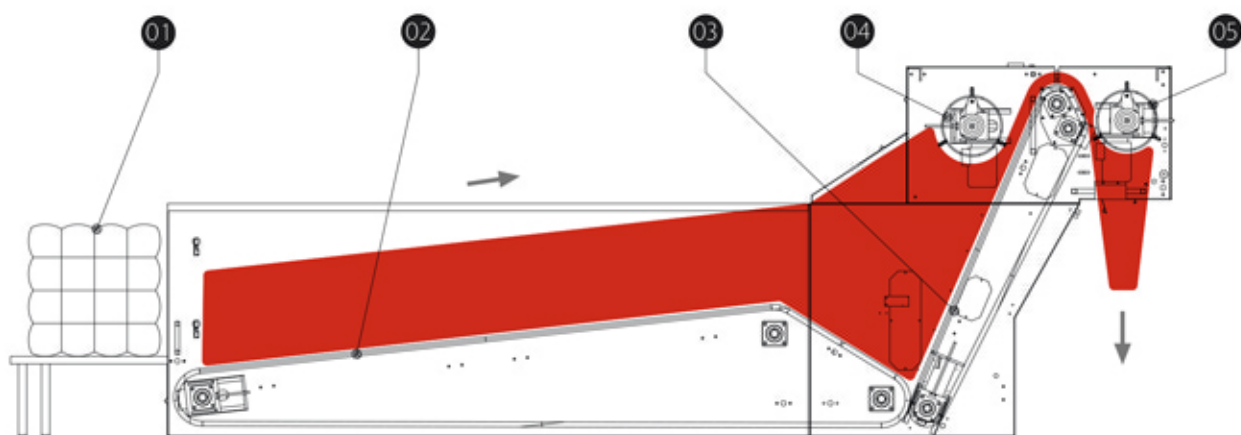


THE MATERIAL, USUALLY AVAILABLE AS PRESSED BALES (01), IS TRANSFERRED BY THE FEEDING BELT (02) TO THE INCLINED SPIKED BELT (03). THE CONICAL PINS OF THE BELT OPEN THE FIBRES AND TAKE THEM TO THE DISCHARGING ROLLER (05). THE DOSING ROLLER (04) PLAYS A CRUCIAL ROLE DURING THE FIBRE FEED PHASE AND GUARANTEES THAT A CONSTANT MATERIAL QUANTITY IS FED TO THE FOLLOWING PROCESS PHASES, BY ALLOWING AT THE SAME TIME A PRELIMINARY FIBRE OPENING PROCESS

喂料平帘(02)将通常是压实包装的原料(01)输送至喂料角钉斜帘(03),斜帘上锥形圆钉对原料进行开松并转移给卸料罗拉(05)。在喂料过程中匀料辊(04)起了关键作用,其使喂入下道工序的原料量保持稳定,同时对纤维进行初步开松。

bale opener/开包机

notes/说明

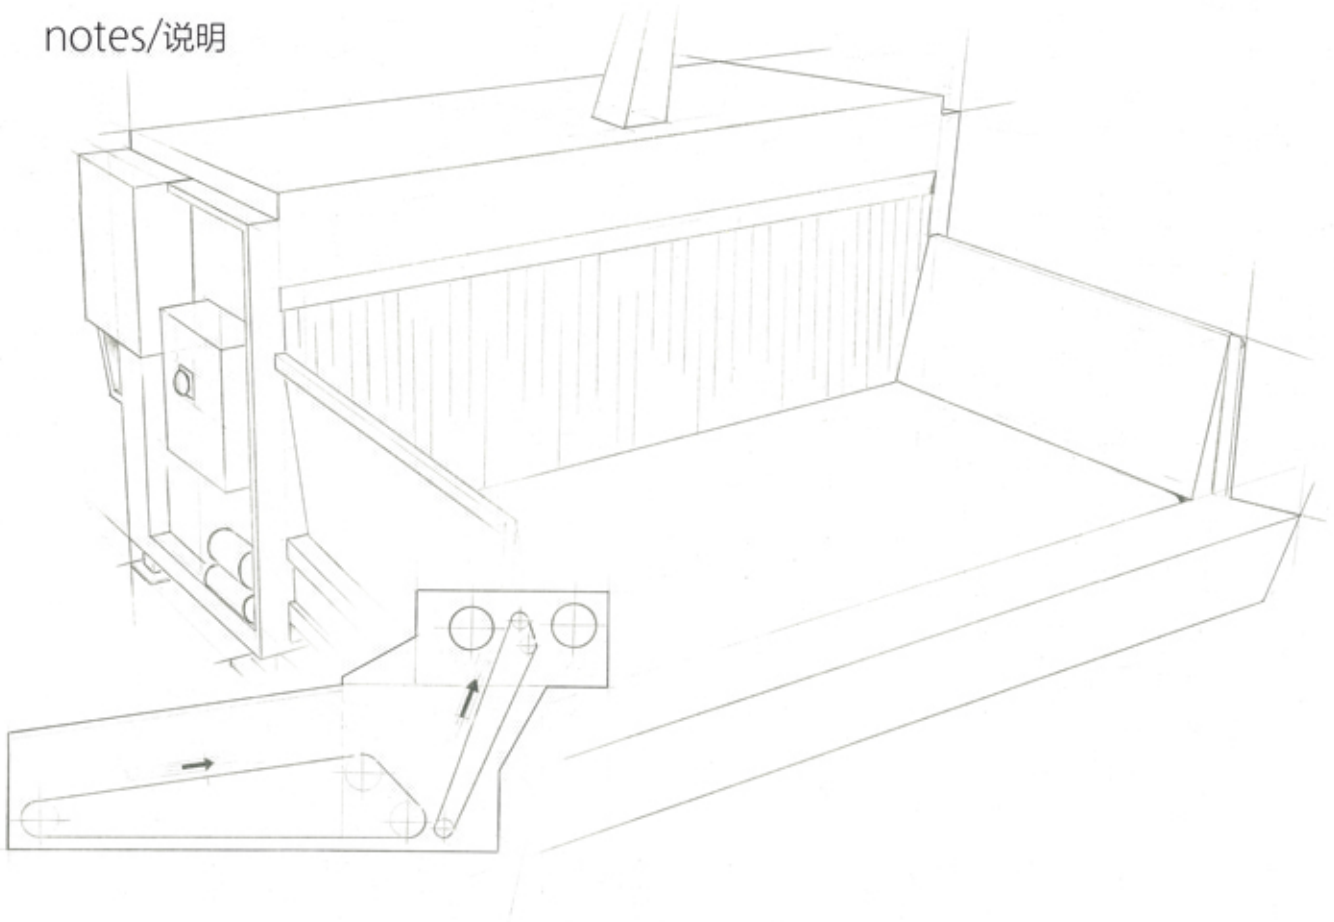

BALE LOADING WIDTH: 2000 TO 4000 MM
(OPTIONS AVAILABLE UPON REQUEST)

BALE LOADING LENGTH: UP TO 15000 MM
(OPTIONS AVAILABLE UPON REQUEST)

MACHINE OUTPUT: UP TO 3000 KG/HOUR
(DEPENDING ON THE TYPE OF FIBRE IN PROCESS AND MACHINE WIDTH)

喂料平帘幅宽: 2000 到 4000毫米
(根据需求可变)

喂料平帘长度: 最长可达15米
(根据需求可变)

喂料能力: 最高可达3000公斤/小时
(取决于原料种类和设备幅宽)

CONSTANT FIBRE FEEDING

VARIABLE SPEED CONVEYOR BELT LOADING

FIBRES PICK-UP BY AN INCLINED SPIKED BELT

FIBRE DOSING ROLLER AND PRECISION FIBRE DISCHARGING ROLLER

稳定的纤维喂料量

输送带喂料速度可调节

通过一个角钉斜帘获取纤维

均料辊和高精度剥料辊

