


step cleaner/阶梯式除杂机

reference line/生产线参考

- WOOL DEBURRING LINE 羊毛除杂生产线
- TOPENING AND BLENDING LINE 和毛与纤维混合生产线
- WOOLLEN SPINNING LINE 粗梳毛纺生产线

process flow/生产流程

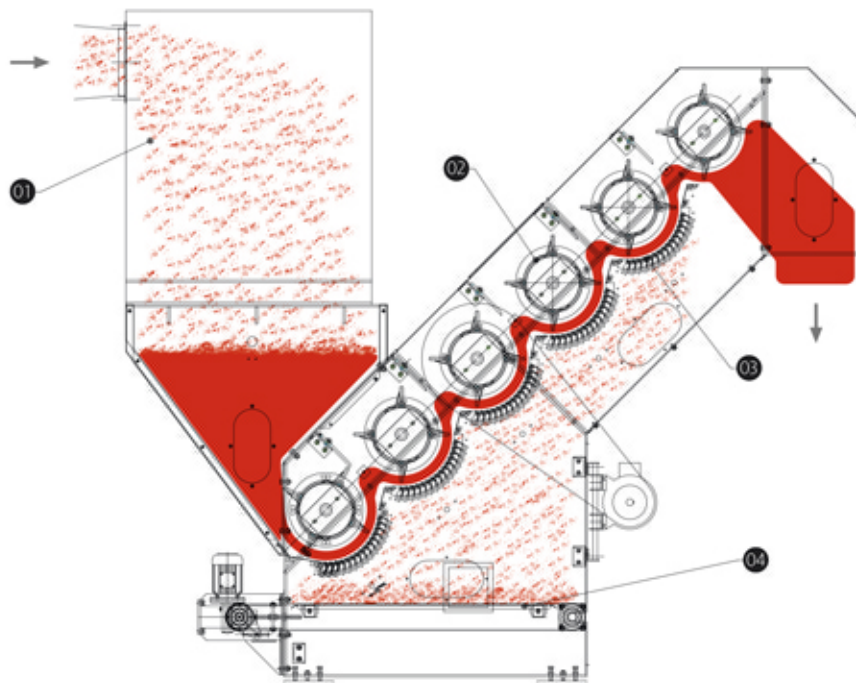


- 01. CYCLONE OR CONDENSER 01. 纤维凝聚器
- 02. CLEANING ROLLERS 02. 击打棒
- 03. ADJUSTABLE GRIDS 03. 尘笼
- 04. WASTE COLLECTING BELT 04. 落物回收帘

THE FIBER IS FED TO THE MACHINE THROUGH A CYCLONE (01) OR FEED CONDENSER AND TRANSPORTED TO DELIVERY SIDE BY A SERIES OF SPECIAL CLEANING ROLLERS (02) THE IMPURITIES ARE SEPARATED BY THE ACTION OF A CLEANING ROLLER AND GRIDS (03). VEGETABLE IMPURITIES AND DUST ARE COLLECTED AND EVACUATED BY THE WASTE COLLECTING BELT (04)

物料通过一个旋风分离器(01)或一个纤维凝聚器喂入设备,其进入一组专门的击打棒(02),在击打棒和尘笼(03)共同作用下,物料中的杂质被分离出来.它们被落物回收帘(04)收集并移出设备

step cleaner/阶梯式除杂机

notes/说明

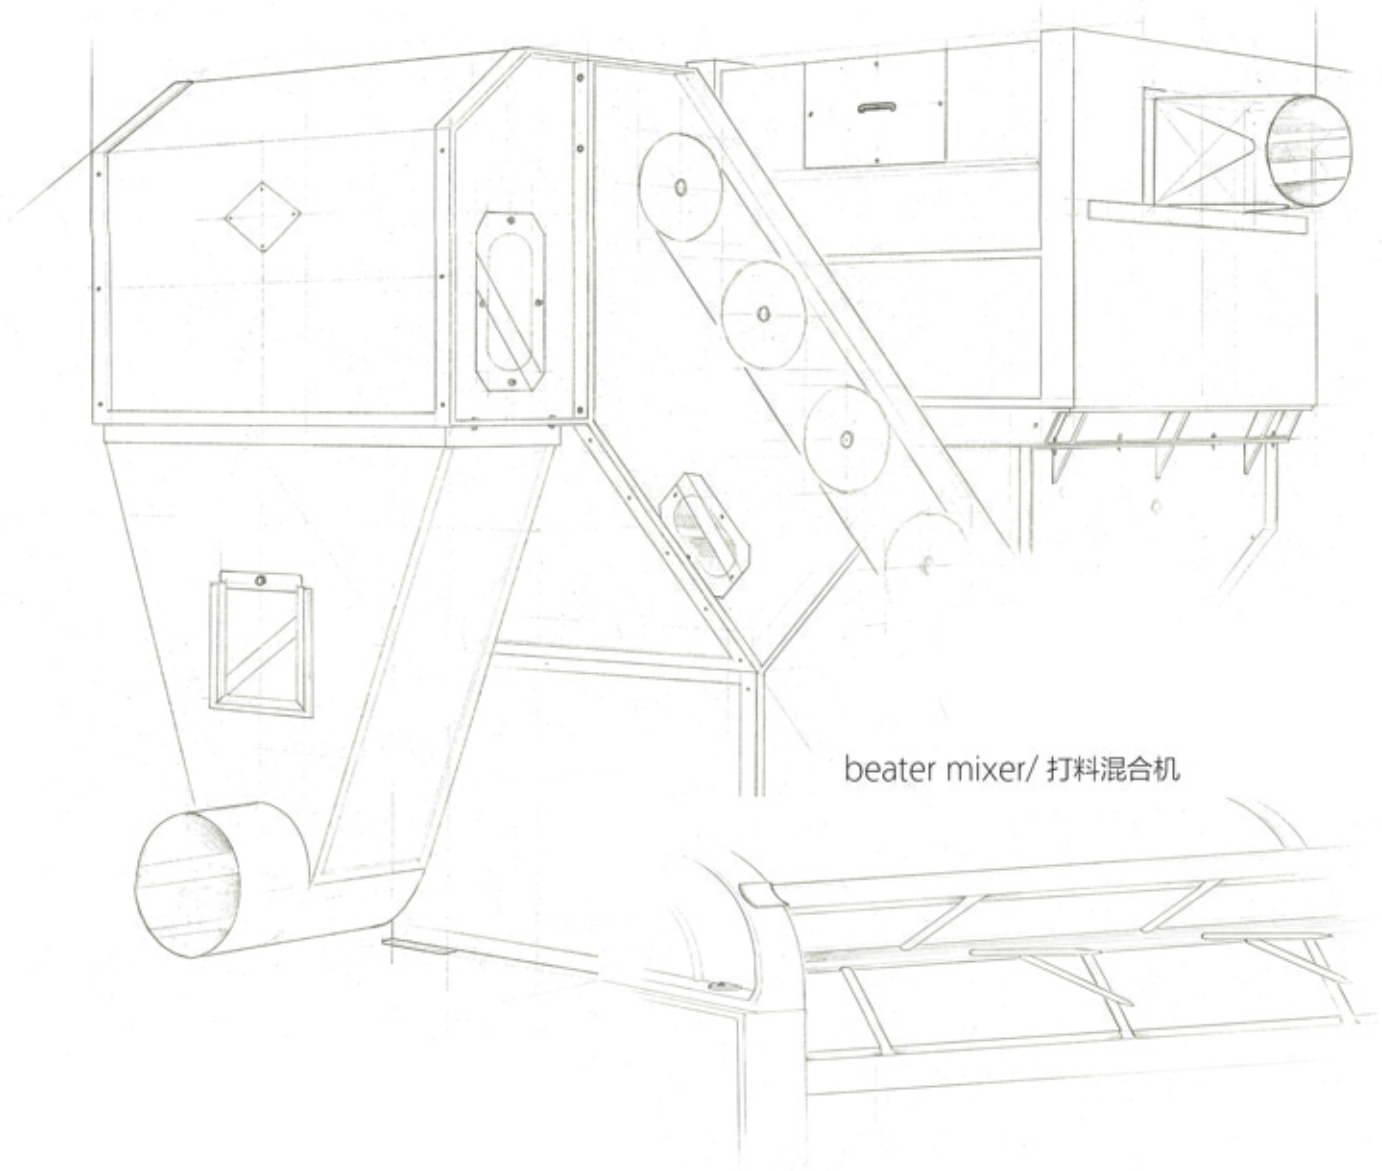

beater mixer/ 打料混合机

WORKING WIDTH: 1000 TO 3000 MM
(OTHER OPTIONS AVAILABLE UPON REQUEST)
MACHINE OUTPUT: 300 TO 1000 KG/HOUR, DEPENDING ON
FIBRE TYPE AND CONDITIONS
AVAILABLE FIBRE FEEDING CONFIGURATIONS:
MANUAL, BY A CONVEYOR BELT
AUTOMATIC, BY AN ASPIRATED CYCLONE OR FEED CONDENSER

工作幅宽: 1000 - 3000毫米
(可以根据要求提供其它尺寸)

设备生产能力: 300 - 1000公斤/时, 取决于纤维物料
种类和状态

喂料方式:

手动, 或自动喂料帘, 或旋风分离器/纤维凝聚器

