


carding willow/和毛机

reference line/生产线参考


- WOOL DEBURRING LINE 羊毛除杂生产线
- OPENING AND BLENDING LINE 和毛与纤维混合生产线
- WOOLLEN SPINNING LINE 粗梳毛纺生产线

process flow/生产流程

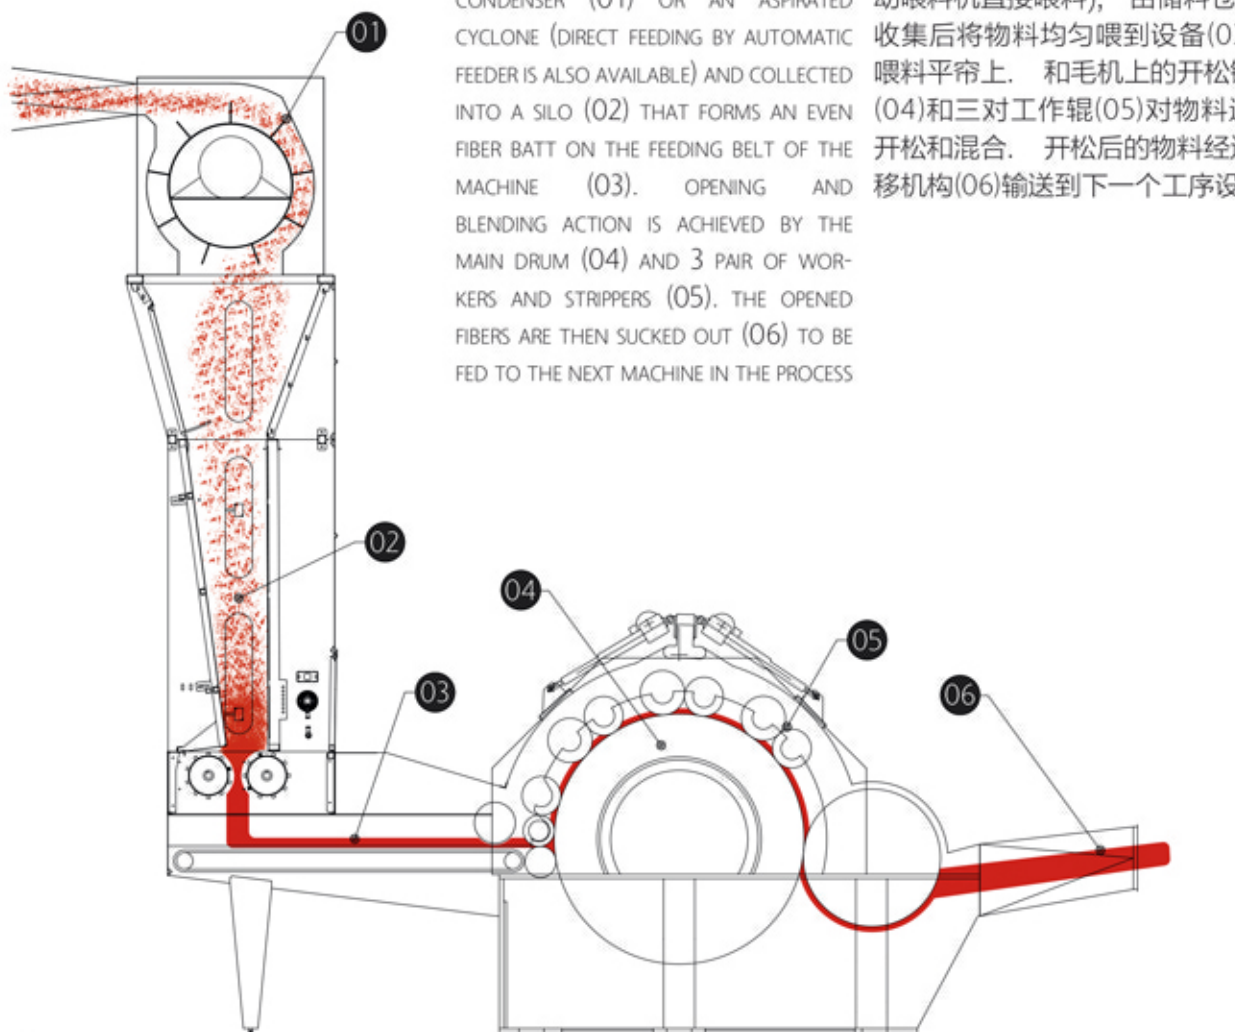

carding willow/和毛机

notes/说明

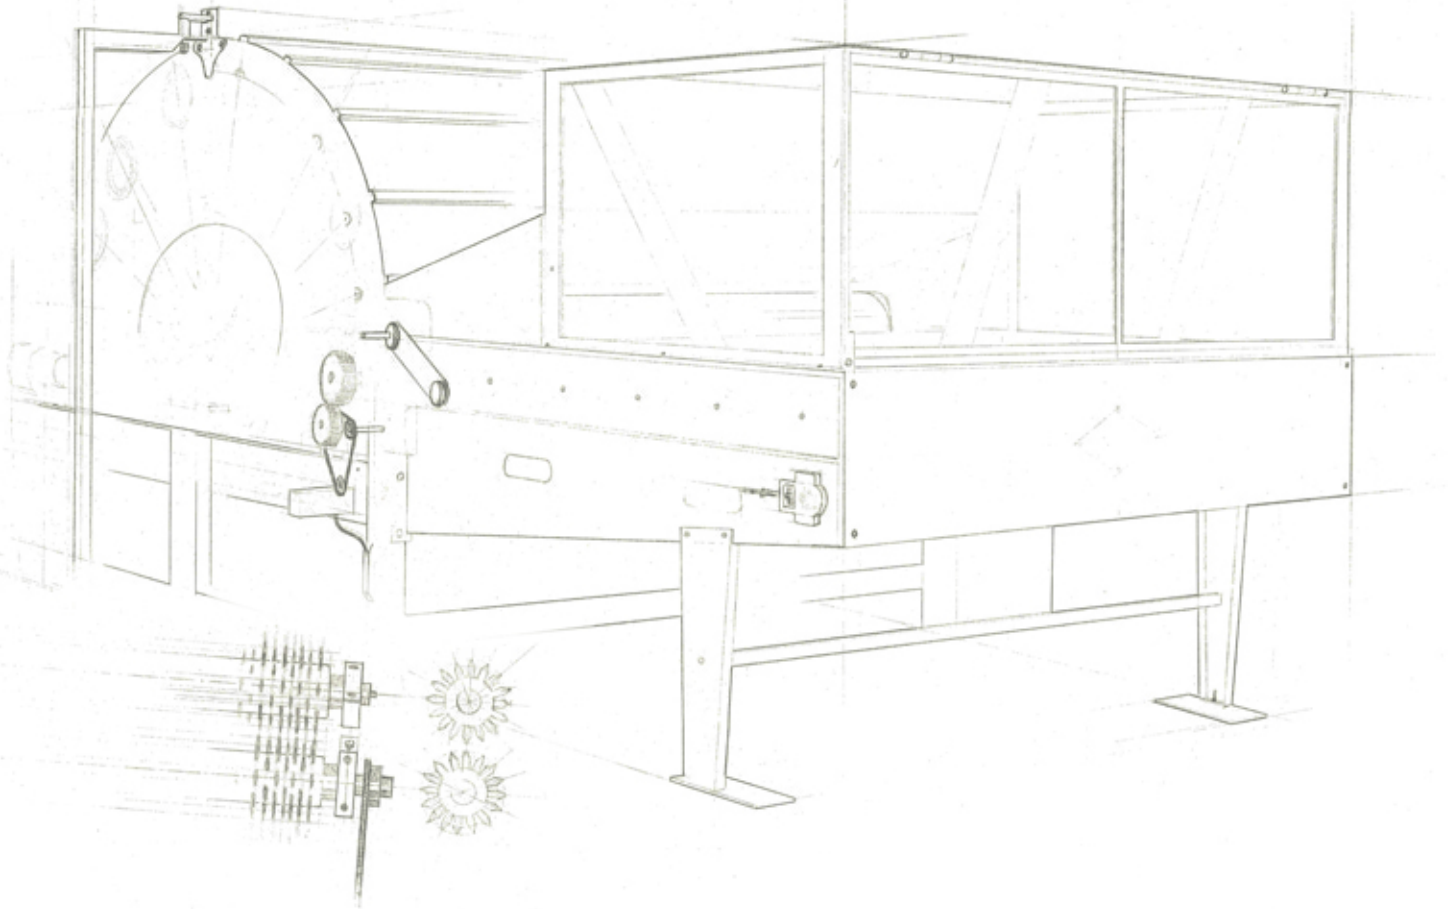

WORKING WIDTH: 1000 TO 1800 MM

PROCESS OF NEW OR REGENERATED FIBERS

PRODUCTION CAPACITY UP TO 2500 KG/HOUR

THE MACHINE FEATURES: STEEL DRUM (DIAMETER 1000 MM)

3 PAIRS OF WORKERS AND STRIPPERS WITH SPECIAL WIRE COVERING

HIGH DEGREE OF FIBER OPENING AND BLENDING

MATERIAL FEEDING FROM CYCLONE, FEED CONDENSER OR AUTOMATIC FEEDER.

ADJUSTABLE ROTATION SPEED OF THE MAIN CYLINDER, DEPENDING

ON THE TYPE OF FIBER BEING PROCESSED

PROFILED METAL WIRE TO MINIMISE FIBER BREAKING/SHORTENING

工作幅宽:1000 毫米 - 1800毫米

新纤维或再生纤维加工能力: 最高达2500公斤/时

开松锡林为钢质(直径1000毫米),三对工作辊及剥毛
辊上覆盖特殊齿条,保证良好开松度和混合度

供料方式包括旋风分离器, 纤维凝聚器,或自动喂料机
直接喂入

根据在制纤维原料特点, 可以调节开松锡林转速

具有特殊外形设计的开松齿条使纤维断裂/截短程度
最小化

